




Capresso Perfectea 260 Motherboard Replacement

Replace the motherboard with the Capresso Prefectea 260.

Written By: Rohin Chander

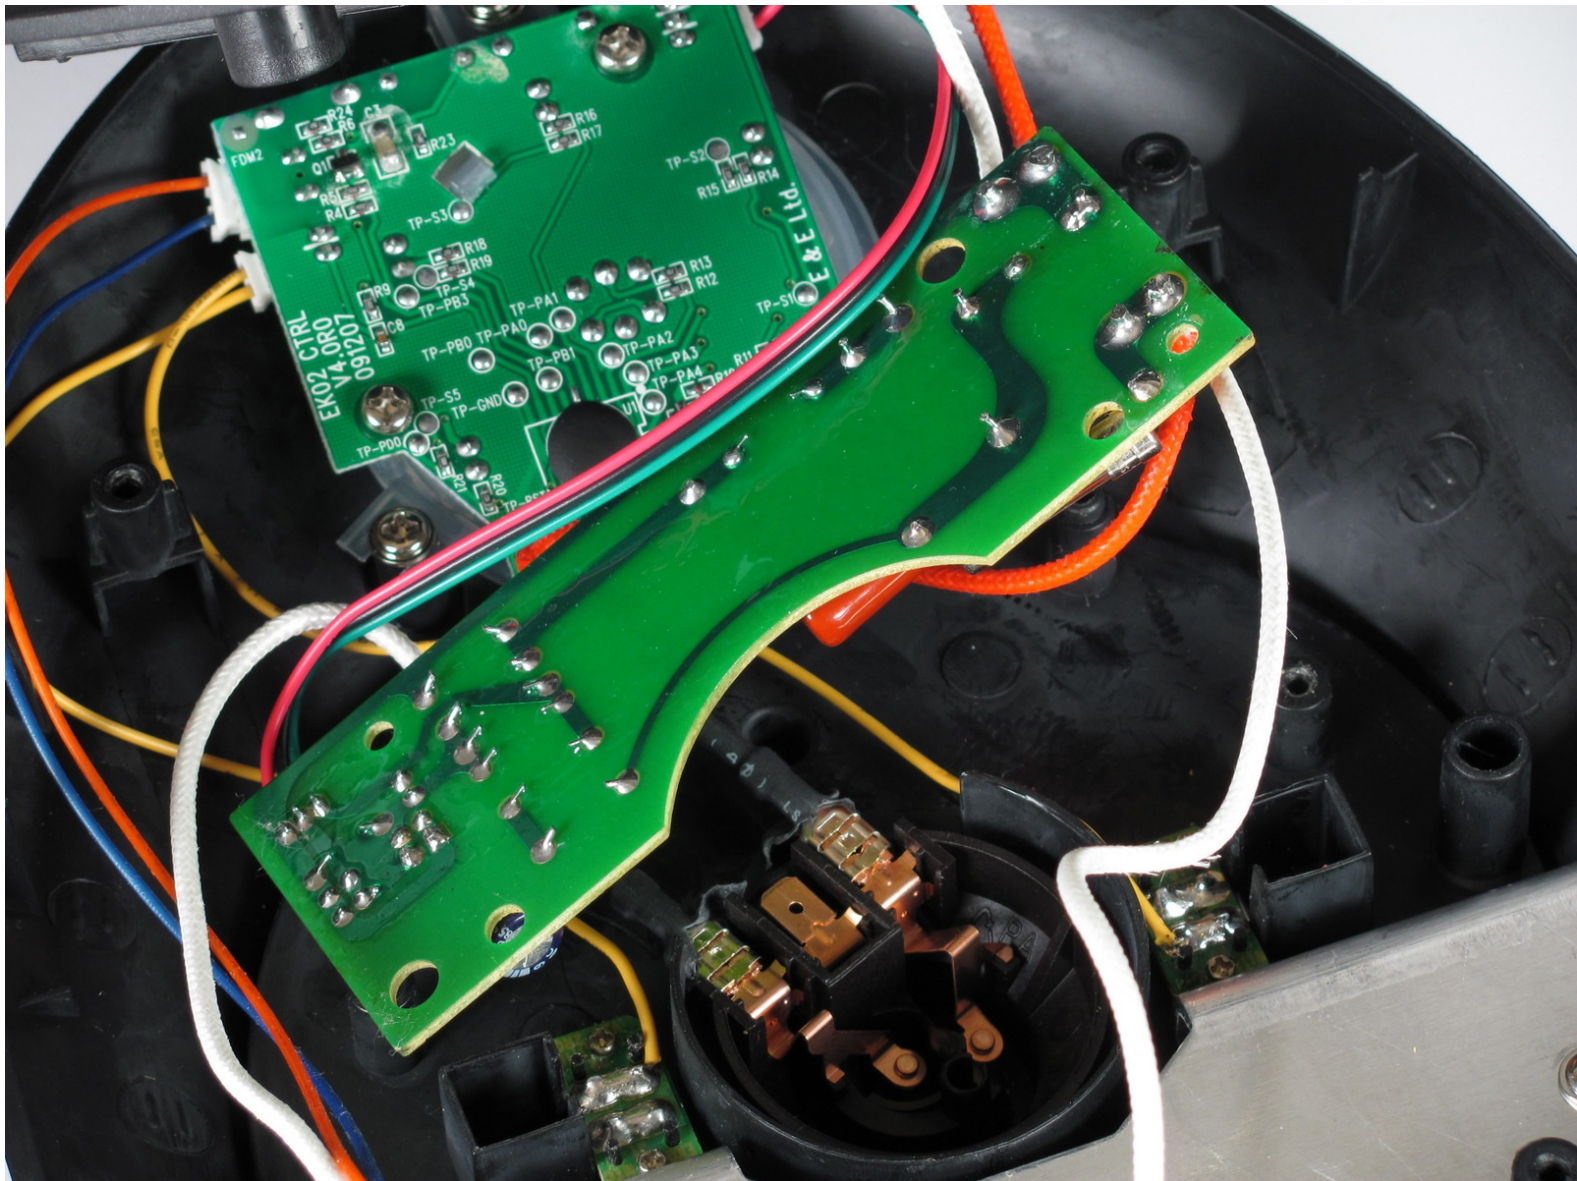

INTRODUCTION

This guide will teach you how to replace the motherboard within the Capresso Perfectea.



TOOLS:

- [Phillips #2 Screwdriver](#) (1)
 - [Metal Spudger](#) (1)
-

Step 1 — Motherboard



- First, take the base of the device and flip it over.

Step 2




- Remove the four 12 mm Phillips #2 screws surrounding the base then lift the bottom half of the base to expose the circuit boards inside the device.

Step 3




- Remove the two 7.5 mm Phillips #2 screws holding in the motherboard

Step 4

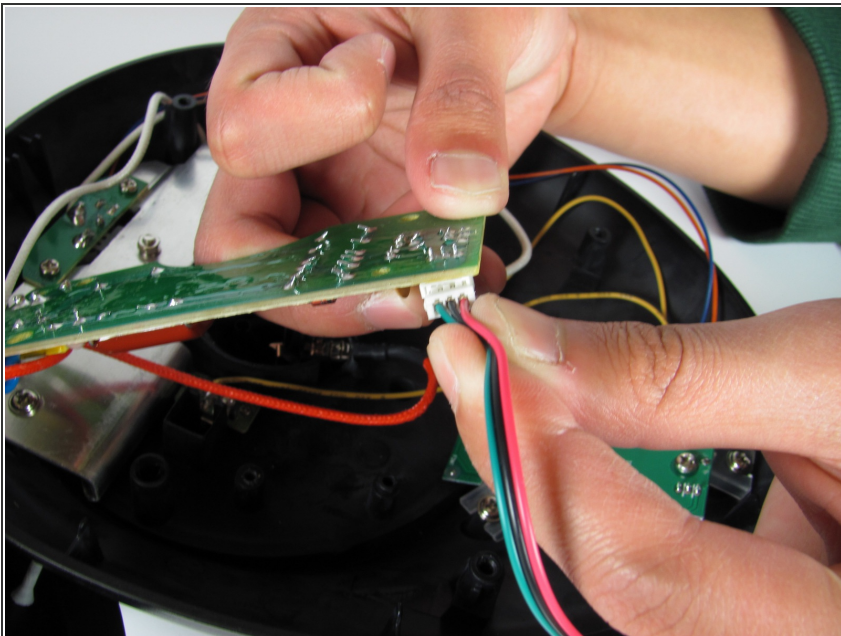

- Unplug the wire going into the side of the motherboard

Step 5

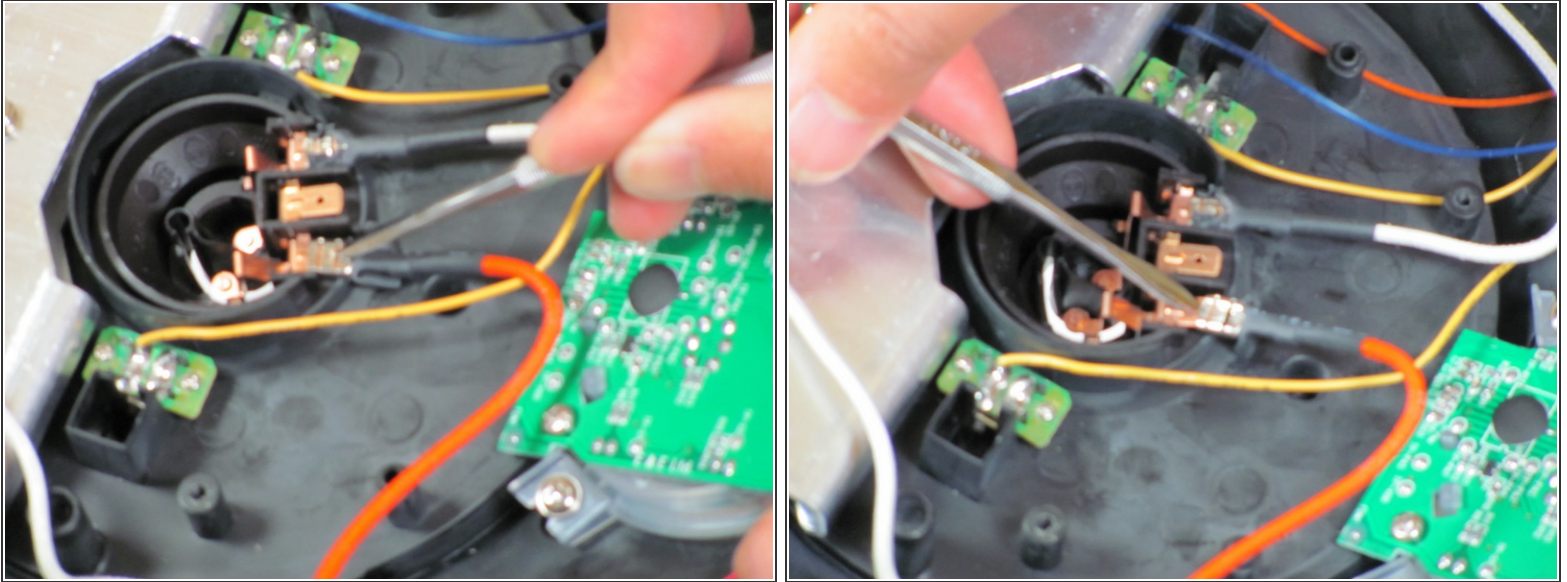

- Use the metal spudger to cut open the rubber covering the latch where it clamps onto the copper tab.
- Unplug wire at heating element by first using the metal spudger to push the latch in and then pushing it out.

⚠ Be careful when unplugging the wire as if it is done too forcefully it can damage the connection and make it difficult to connect a new motherboard

Step 6



- Lift the motherboard out of the device

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 01:17:38 PM.